

**EN 62233: 2008 TEST REPORT**

**For**

**Far Infrared Sauna**

**Of**

**Shenzhen Josen Industrial Co., Ltd  
No.57 PingXi Mid-Road, PingXi Village, PingDi Town, LongGang  
District, ShenZhen, China**

**Model Number:**

**DNY-6106,6202,6210,6310,6232,6444,6235,6434,6225,6101,6228,  
GDI-6202,62326272,6424,6445,6235,6109**

Prepared for : Shenzhen Josen Industrial Co., Ltd  
Address : No.57 PingXi Mid-Road, PingXi Village, PingDi Town, LongGang  
District, ShenZhen, China

Prepared by : Centre Testing International (Shenzhen) Co., Ltd.  
Address : Hongwei Industrial Zone, Bao'an 70 District,  
Shenzhen, Guangdong, China

Tel : +86-755-3368 3668  
Fax : +86-755-3368 3385

Report Number : EESZE05170016-1  
Date of Test : May 17, 2012 to May 18, 2012  
Date of Report : May 21, 2012

Tested by: Rita Xiao

Reviewed by: Louisa Lu

Approved by: Jimmy Li

Date: May 21, 2012

Lab manager



## GENERAL INFORMATION

**Applicant** : Shenzhen Josen Industrial Co., Ltd  
No.57 PingXi Mid-Road, PingXi Village, PingDi Town,  
LongGang District, ShenZhen, China

**Manufacturer** : Shenzhen Josen Industrial Co., Ltd  
No.57 PingXi Mid-Road, PingXi Village, PingDi Town,  
LongGang District, ShenZhen, China

**Product Name** : Far Infrared Sauna

**Trade Name** : JOSEN

**Model Number** : DNY-6106, 6202, 6210, 6310, 6232, 6444, 6235, 6434, 6225,  
6101, 6228, GDI-6202, 62326272, 6424, 6445, 6235, 610

**Model difference** : These all models are different from model name All tests were  
conducted on model DNY-6106.

**Serial Number** : N/A

**Power Supply** : 120V 60Hz 300mA 300W

**Standard:** EN62233:2008

### Equipment used during the tests:


Equipment	Manufacturer	Model	Serial No.	Due Date
Magnetic field probe	Narda	2304/03	M-0018	10/27/2012

<b>Standard: EN62233: 2008</b>		<b>Result: <input checked="" type="checkbox"/>Pass / <input type="checkbox"/>Fail</b>				
EUT Name: Far Infrared Sauna		Model No.: DNY-6106				
Input Voltage: <u>120V 60Hz</u>						
Ambient Condition : Temp: <u>25</u> °C Humidity: <u>101</u> %						
Measuring Method: Time domain evaluation (clause 5.5.2 of EN62233)						
Measuring Distance: <u>4&amp;24</u> cm				Coupling Factor: <u>---</u>		
Background Level: <u>1.8</u> mG						
Sensor Locations: <input type="checkbox"/> All surface <input checked="" type="checkbox"/> Around						
Operation mode: continuously (4cm)						
Measuring Positions	Front	Rear	Left	Right	Top	Bottom
Result	10	---	---	---	--	--
Operation mode: continuously (24cm)						
Measuring Positions	Front	Rear	Left	Right	Top	Bottom
Result	2	--	--	--	--	--

## PHOTO OF SETUP



4cm

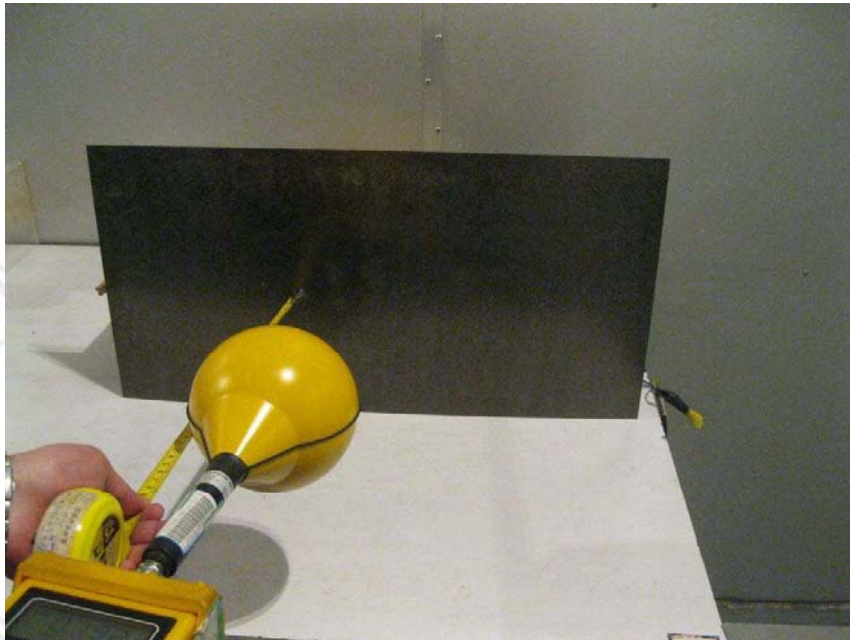

24cm

\*\*\* End of report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.